


# DAYO VALVE CORP.-JAPAN

## SS Butterfly Valve (Lock Lever)

ANSI 150

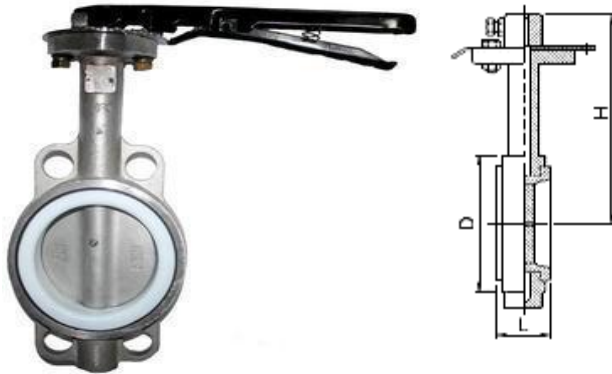

300psi Water, Oil, Gas 65°C  
150psi Saturated Steam

SPECIFICATIONS	
Part	Material
Body	SUS304/316 CF8M
Disc	Stainless Steel T304/316 CF8M
Disc seat ring	PTFE: 0 TO 90°C
Stem	SUS 304/316
Pin	SUS 304/316
Handle	Ductile Iron FCD 45
Indicate Gear	SS 41

Primary Service Pressure Non-Shock (psi)	Hydrostatic Test Pressure	
	Shell	Seat
150	300	220

### Dimension

Unit : mm

	2	2-1/2	3	4	5	6	8	10	12
Size	50	65	80	100	125	150	200	250	300
L	43	46	46	52	56	56	60	68	78
H	160	179	181	201	216	242	256	300	325
D	102	102	133	146	183	217	260	330	375

## SS Butterfly Valve GEAR OPERATED

ANSI 150



300psi Water, Oil, Gas 65°C  
150psi Saturated Steam

SPECIFICATIONS	
Part	Material
Body	SUS304/316 CF8M
Disc	Stainless Steel T304/316 CF8M
Disc seat ring	PTFE: 0 TO 90°C
Stem	SUS 304/316
Pin	SUS 304/316
Handle	Ductile Iron FCD 45
Indicate Gear	SS 41

Primary Service Pressure Non-Shock (psi)	Hydrostatic Test Pressure	
	Shell	Seat
150	300	220

### Dimension

Unit : mm

	2	2-1/2	3	4	5	6	8	10	12
Size	50	65	80	100	125	150	200	250	300
L	43	46	46	52	56	56	60	68	78
H	160	179	181	201	216	242	256	300	325
D	102	102	133	146	183	217	260	330	375